TOWN OF CLAY App. Approved 4401 Route 31, Clay, NY 13041 Authorized Official Date (315) 652-3800 App.Disapproved RESIDENTIAL ADDITION Date **Authorized Official PERMIT APPLICATION** Plumbing Permit Number_ Electrical Work Order Number Department of Planning and Development Permit Number Board Approval Date Filed Tax Map Number - -***Applicant – do not write above this line*** □ Visit us online at: www.townofclay.org **Property Information** Address or Tract/Lot **ADDITION SIZE:** Zip (Length) X (Width) Zoning District Owner Information - PLEASE PRINT _ (Height) _____ (Sq. FEET) **Property Owner** Owner's Address City Zip (Bathrooms) Owner's Phone No.(H) (W) Building Permit Fees. Where the TOTAL VALUATION of the work is: Owner's Signature: \$1 - \$1000 \$25.00 For each additional \$1,000.00 or fraction thereof............ \$ 6.00 Total Value: \$ Permit Fee: \$_____ (cash or check only) **Project Description** Description of Proposed Development or Intended Use Approved Plan Reference: Architect or Engineer Plan Date (Original) Company Last Revision Plan Title Number of Pages Applicant Information: (if different from owner) (Name of individual signing application) (agent, contractor, corporate officer, etc.) Zip_ (Address) (City) Phone (Signature) APPLICATION IS HEREBY MADE to the commissioner for the issuance of a Building Permit pursuant to the New York State Uniform Fire Prevention and Building Code for the construction of buildings, additions or alterations, or for removal or demolition, as herein described. The applicant agrees to comply with all applicable laws, ordinances and regulations. Contractor Information: Name of Contractor Site Contact Person Address State Contractors Liability Insurance: ATTACHED, OR ON FILE

.Please attach separate drawing (survey) showing clearly and distinctly all buildings, whether existing or proposed, and indicate all set-back dimensions from property lines.

REV 4/2023

Workers' Compensation Insurance and Disability Insurance: _____ATTACHED, OR _____ON FILE

RESIDENTIAL ADDITION REQUIREMENTS:

- 1. APPLICATION
- 2. SURVEY
- 3. STAMPED ARCHITECTURAL OR ENGINEERS DRAWINGS
- 4. CONTRACTORS INSURANCE, LIABILITY AND WORKERS COMP
- 5. IF DOING WORK YOURSELF MUST HAVE A CE-200 FORM. SEE DIRECTIONS BELOW:
 - Go to 'townofclay.org'
 - Next- go to 'Planning & Development'
 - Next- go to 'Forms, Permits, & Info'
 - Next- Click on 'Certificate of Attestation of Exemption' (CE-200) and click on the link.
 - Please print your certificate and bring it in with your application.
- 6. PERMIT FEE ACCORDING TO COST OF CONSTRUCTION

WE WILL BE INSPECTING:

- 1. FOOTER
- 2. FOUNDATION
- 3. FRAMING
- 4. AIR SEALING
- 5. FIRE SEALING
- 6. INSULATION
- 7. ELECTRICAL
- 8. PLUMBING (IF NEEDED)
- 9. FINAL INSPECTION

Department of Planning & Development

TOWN of CLAY

A great place to live, work, and raise a family.

4401 State Route 31 Clay, New York 13041-8707 Website: www.townofclay.org

_1. Permit Application

Phone: (315) 652-3800 Fax: (315) 622-7259 E-mail: planning@townofclay.org

PROCEDURES FOR OBTAINING A NEW PRESIDENTIAL HOME OR ADDITION BUILDING PERMIT

| 2. 2 Sets o | f Stamped Architectural Drawings, one set of 11x17 drawings, and an electronic file. |
|--|---|
| 3. Drivewa | y PermitTown RoadCounty Road |
| 4. All Plan | s must be complete and meet the following or they will not be accepted: |
| a) b) c) d) e) f) g) h) | 2020 International Residential Code 2020 International Plumbing Code 2020 International Mechanical Code 2020 International Fuel Gas Code 2020 NYS Uniform Code Supplement 2020 International Energy Conservation Code 2020 NYS Energy Code Supplement NFPA 70 2020 National Electrical Code |
| 5. Truss Ce | ertifications |
| 6. Survey S | Showing Placement of New Home |
| 7. Approve | ed Septic System Design where applicable |
| 8 Contract | or Certificate of Liability Insurance |
| 9. Contrac | tor Certificate of NYS Workman's Compensation Insurance & Disability |
| 10. Fee (Se | ee Permit Application) |
| | aga County Plumbing (315)435-6614 (For ALL Plumbing inspections, nent (315)435-6617, Onondaga County Water Authority (OCWA) (315)455-7061 |
| 12. Electri | cal Inspection Agencies (Choose One) |
| 1) 2) 3) 4) | CNY Electrical Inspection, LLC Larry Kinne (315-633-0027 Commonwealth Electrical Inspection Service, 1-800-801-0309 The Inspector, Tim Willsey 1-800-487-0535 or 315-247-9162 Middle Department Inspection Agency, Aaron Bellows 315-452-5304 |

Permit approval time will be based on the extent of the project – A MINIMUM OF 5 BUSINESS DAYS

All plumbing, electrical and driveway permits must be applied for before the release of the building permit.

Town of Clay


NOTICE OF UTILIZATION OF TRUSS TYPE CONSTRUCTION, PRE-ENGINEERED WOOD CONSTRUCTION AND/OR TIMBER CONSTRUCTION

| Owner of Subject Property: |
|---|
| Subject Property: Street address and tax map number of the subject property |
| Check what permit is for |
| New Residential Structure |
| Addition to existing residential structure |
| Rehabilitation to existing residential structure |
| to be constructed or performed at the subject property reference above will utilize (Check applicable line) |
| truss type construction (TT) |
| pre-engineered wood construction (PW) |
| timber construction (TC) |
| in the following location(s) (check applicable line): |
| floor framing, including girders and beams (F) |
| roof framing (R) |
| floor framing and roof framing (FR). |
| By signing and dating below you state the above information will be followed. |
| Date: |
| Signature of person submitting the form |
| Print Name of above person |
| owner owners representative |

Section 1265.4. Sign or symbol.

- (a) Each new residential structure and each addition to or rehabilitation of an existing residential structure that utilizes truss type construction, pre-engineered wood construction and/or timber construction shall be identified by a sign or symbol in accordance with the provisions of this Part.
- (b) The sign or symbol required by this Part shall by affixed to the electric box attached to the exterior of the residential structure; provided, however, that:
- (1) if affixing the sign or symbol to the electric box would obscure any meter on the electric box, or if the utility providing electric service to the residential structure does not allow the sign or symbol to be affixed to the electric box, the sign or symbol shall be affixed to the exterior wall of the residential structure at a point immediately adjacent to the electric box; and
- (2) if no electric box is attached to the exterior of the residential structure or if, in the opinion of the authority having jurisdiction.

SAMPLE ONLY

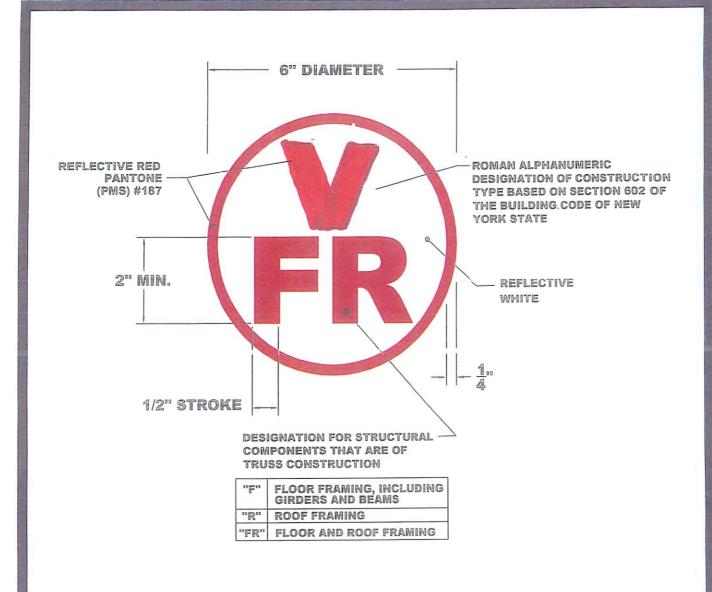

TRUSS IDENTIFICATION SIGN
COMPLIANCE WITH 19 NYCRR PART 1264



EXAMPLE TRUSS IDENTIFICATION SIGN DATE:03/08/2005

NEW YORK STATE DEPARTMENT OF STATE DIVISION OF CODE ENFORCEMENT AND ADMINISTRATION



Get Free Help from Energy Code Experts

Residential Plan Review Checklist

2015 Residential Provisions as amended by the 2016 Energy Code Supplement

| Project #: <u>43.6220.02-</u> Date:Nar | me of Evaluate | or(s):_ | | | |
|--|-------------------|---------|-------|----------|-----------------------------------|
| Building Contact: Name: F | Phone: | | | Email: | |
| Building Name & Address: | | | | | |
| Subdivision: | Lot #: | | | _ Co | onditioned Floor Area: ft² |
| Climate Zone: County: | Jurisdiction | : | | | |
| Compliance Approach: Prescriptive Trade-Off | Performance | | Com | pliance | e Software |
| Compliance Software Used: | | Gre | en Bı | uilding/ | Above-Code Program? Yes No |
| Building Type: 1- and 2-Family, Detached: Single Fa | amily 🔲 N | 1odula | ar | □т | ownhouse |
| Multifamily: ☐ Apartmer | nt 🗆 C | ondo | miniu | m | |
| Project Type: New Building Existing Building | ng Addition | | | existing | Building Renovation |
| Special Considerations: | ng | | | omme | rcial Space |
| | | | | | |
| Provisions Highlighted in Blue are Mandatory, Regardless | of Compliand | e Pat | :h | | |
| | | | | | |
| IECC Code | Verified | C | ompl | ies | |
| Section # Pre-Inspection/Plan Review Value | Verified Value | Υ | N | N/A | Comments/Assumptions ¹ |
| R103.2 Construction drawings and documentation available. | | | | | |
| Documentation sufficiently | | | | | |
| demonstrates energy code compliance. | | | | | |
| Insulation materials and their R-values | | П | | П | |
| Fenestration U-factors | | | | | |
| Area-weighted U-factor | | | | | |
| Mechanical system design criteria | | | 4 | | |
| Mechanical and service water heating system and equipment ty and efficiencies | ypes, sizes | ш | | | |
| Equipment and systems controls | | П | П | П | |
| Duct sealing, duct and pipe insulation and location | | | | | |
| Lighting fixture schedule with wattage | | | | | |
| Air sealing | | | | | |
| R403.7 HVAC loads calculations: | | | | | |
| Heating system size(s): Cooling system size(s): | kBtu: | | | | |
| UVUITIU avaletti aizetat. I | kBtu: | | | | |

¹ Use Comments/Assumptions to document code requirements that pass due to exceptions, and specify the exception. Also use Comments/Assumptions to document multiple values observed for a given code requirement, such as multiple equipment efficiencies.

| IECC | | | Verified | Complies | | es | |
|--------------------------|--|---|-------------------------|----------|---|------|----------------------|
| Section # | Requirement | Code Value | Value | Y | N | N/A | Comments/Assumptions |
| R401.3 | Certificate Posting | In furnace/ utility room or approved location | Identify location | | | | |
| Table R402.1.2 | Slab edge insulation R-value. | Unheated: R-10 Heated: R-15 | R Unheated Heated | | | | |
| Table R402.1.2 | Slab edge insulation depth/length. | 2 ft. Z- 4 & 5 4 ft. Z-6 | ft. | | | | |
| Table R402.1.2 | Basement wall insulation R-value ⁱ . | Continuous: R-10 Z-4 R-15 Z-5, Z-6 Cavity: R-13 Z-4 R-19 Z-5, Z-6 | R | | | | |
| R402.2.9 | Basement wall insulation depth. | 10 ft. or to basement floor | ft. | | | | |
| Table R402.1.2 And | Crawl space wall insulation R-value. From floor to finished grade, plus 2' vertical or horizontal | Continuous: R-10 Z-4 R-15 Z-5, Z-6 Cavity: R-13 Z-4 | R | | | | |
| R402.2.11 | | R-19 Z-5, Z-6 | | | | | |
| R402.2.11 | Crawl space continuous vapor retarder | Required Class I | | | | | |
| R303.2.1 | Exposed foundation insulation protection. | 6" below grade | | | | | |
| R403.9 | Snow melt controls. | Automatic controls over 50°F | | | | | |
| Table R402.1.2 | Fenestration U-factor ⁱⁱ | Max: U-0.35 Z-4 U-0.32 Z5, Z-6 | U | | | | |
| R402.5 | Maximum Fenestration U-factor, Area weighted average (trade-offs) | Max: U-0.48 Z-4, Z-5 U-0.40 Z-6 | U | | | | |
| Table R402.1.2 | Glazed Fenestration SHGC | Max: 0.40 Z-4 NR Z-5, Z-6 | SHGC | | | | |
| R402.4.3 | Glazed fenestration air leakage. | 0.3 cfm/ft ² max | cfm/ ft ² | | | | |
| | Window Manufacturer | | | | | ATT- | |
| R402.4.3 | Sliding door air leakage. | 0.3 cfm/ft ² max | cfm/ ft ² | | | | |
| R402.4.3 | Swinging door air leakage | 0.5 cfm/ft² max | cfm/ ft ² | | | | |
| | Door Manufacturer | | | | | | |
| Table R402.1.2 | Floor insulation R-value. | Wood: R-19 Z-4 R-30 Z- 5 & 6 ⁱⁱⁱ Steel: ^{iv} See footnote | R Wood Steel | | | | |
| Table R402.1.2 | Wall insulation R-value | Wood: Z-4 and Z-5 = R-20 or R-13+5 Z-6 = R-20+5 or 13+10 Steel: ^v See footnote | R Wood Steel | | | | |

| IECC | | | Verified | Complies | | es | |
|-------------------|---|--|-----------------------|----------|---|--------|----------------------|
| Section # | Requirement | Code Value | Value | Y | N | N/A | Comments/Assumptions |
| Table R402.1.2 | Ceiling insulation R-value | Wood: R-49 (All Zones) | R | | | | |
| | | Steel Truss ^{vi} R-38+5 | ☐ Wood ☐ Steel | | | | |
| R402.2.3 | Eave Baffle | For air- permeable insulation | | | | | |
| Table R402.1.2 | Mass wall insulation R-value. | R-8/13 Z-4 ^{vii} R-13/17 Z-5 ^{vii} R-15/20 Z6 ^{vii} | R | | | | |
| R402.2.13 | Sunroom wall insulation (Enclosing conditioned space) | Per Table R402.1.2 | R | | | | |
| R402.2.13 | Sunroom wall insulation (Thermally isolated and conditioned) | R-13 All climate zones | R | | | | |
| R402.2.13 | Sunroom ceiling insulation (Enclosing conditioned space) | Per Table R402.1.2 | R | | | | |
| R402.2.13 | Sunroom ceiling insulation (Thermally isolated and conditioned) | R-19 Z-4 R-24 Z-5, Z-6 | R | | | | |
| R402.3.5 | Sunroom glazing U-factor (Enclosing conditioned space) | Per Table R402.1.2 | U | | | | |
| R402.3.5 | Sunroom glazing U-factor (Thermally isolated and conditioned) | U-0.45 max. (All Zones) | U | | | | |
| R402.3.5 | Sunroom skylight U-factor (Enclosing conditioned space) | Per Table R402.1.2 | U | | | | |
| R402.3.5 | Sunroom skylight U-factor (Thermally isolated and conditioned) | U-0.70 max. (All Zones) | U | | | | |
| | Skylight Manufacturer | | | | | | |
| R402.2.4 | Attic access hatch and door (insulation) | R-49 (All Zones) | R | | | | |
| R402.2.4 | Attic access hatch and door (weather-stripping) | Wood frame or equivalent insul. retainer | | | | | |
| R402.4.6 | Tenant separation walls | R-10 w/ air seal | R | | | | |
| R402.4 | Air Leakage (Building Thermal Envelope) | All building materials installed per Table R402.1.1 | | | | | |
| R402.4.1.2 | Air Leakage Testing | 3 air changes per hour (All zones) Blower door test | ☐ Stated | | | | |
| R402.4.5 | IC-rated recessed lighting fixtures meet infiltration criteria. | ≤ 2.0 cfm air leakage | ☐ Stated | | | | |
| | | Sealed | Stated | | | 77,000 | |
| R402.4.4 | Rooms containing fuel burning appliances | Outside or enclosed in a room | ☐ Meets exceptions | | | | |
| R402.1.1 | Vapor Retarder (IRC R702.7) | Class I or II (Zones 5 and 6 only) | | | | | |
| R403.1.1 | Thermostat | Programmable | | | | | |

| IECC | | | Verified | C | ompli | es | |
|-----------|--|--|--|---|-------|-----|----------------------|
| Section # | Requirement | Code Value | Value | Y | N | N/A | Comments/Assumptions |
| R403.3.1 | Duct insulation. | Supply & Return in Attics: R-8 for ≥3" Dia. R-6 for <3" Dia. Other: R-6 for ≥3" Dia. R-4.2 for <3" Dia. | ☐ Inside building thermal envelope exception | | | | |
| R403.3.2 | Duct sealing complies with listed sealing methods. | All joints and seams | ☐ Meets exception | | | | |
| R403.3.3 | Duct Testing | 0.1 inch w.g. pressure differential | Stated | | | | |
| | | Rough-in test required | ☐ Stated | | | | |
| | | Post construction test required | ☐ Stated | | | | |
| | | | ☐ Exception | | | | |
| R403.3.5 | Building cavities NOT used as ducts or plenums | Stated? Shown? | | | | | |
| R403.4 | HVAC piping insulation. | R-3 (>105°For <55°F) | R | | | | |
| R403.5.1 | Heated water circulation and temperature maintenance system | Per requirements of Section R403.5.1.1 or R403.5.1.2 | ☐ Circulation System ☐ Heat Trace System | | | | |
| R403.5.3 | Hot water pipe insulation | R-3 per specified locations | | | | | |
| R404.1 | Lighting – Minimum 75% of lamps are high efficacy. | | | | | | |
| R402.4.2 | Wood burning fireplace | Tight-fitting flue damper or doors | | | | | |
| R403.10 | Pool heaters, covers, and automatic or accessible manual controls. | Accessible on/off switch. Time Switch | | | | | |

ii One side-hinged door up to 24 ft² can be exempted from the prescriptive door U-factor requirements.
iii Or insulation sufficient to fill the cavity, R-19 minimum.
iv Floor steel frame equivalent: See Table R402.2.6
v Wall steel frame equivalent: See Table R402.2.6
vi Steel truss equivalent: See Table R402.2.6
vi The second R-value applies when more than half the insulation is on the interior of the mass wall.

Table R402.4.1.1 Air Barrier and Insulation Installation



| Component | Air Barrier Criteria | Insulation Installation Criteria |
|--|--|---|
| General requirements | A continuous air barrier shall be installed in the building envelope. The exterior thermal envelope contains a continuous air barrier. Breaks or joints in the air barrier shall be sealed. | Air-permeable insulation shall not be used as a sealing material. |
| Ceiling/attic | The air barrier in any dropped ceiling/soffit shall be aligned with the insulation mid any gaps in the air barrier shall be scaled. Access openings, drop down stairs or knee wall doors to unconditioned attic spaces shall be sealed. | The insulation in any dropped ceiling/soffit shall be aligned with the air barrier. |
| Walls | The junction of the foundation and sill plate shall be sealed. The junction of the top plate and the top of exterior walls shall be sealed Knee walls shall be sealed. | Cavities within comers and headers of frame walls shall be insulated by completely filling the cavity with a material having a thermal resistance of R-3 per inch minimum. Exterior thermal envelope insulation for framed walls shall be installed in substantial contact and continuous alignment with the air barrier. |
| Windows, skylights and doors | The space between window/door jambs and framing, and skylights and framing shall be sealed. | |
| Rim Joists | Rim joists shall include the air barrier. | Rim joists shall be insulated. |
| Floors (including above garage And cantilevered floors) | The air barrier shall be installed at any exposed edge of insulation. | Floor framing cavity insulation shall be installed to maintain permanent contact with (he underside of subfloor decking, or floor framing cavity insulation shall be permitted to be in contact with the top side of sheathing, or continuous insulation installed on the underside of floor framing and extends from the bottom to the top of all perimeter floor framing members. |
| Crawl space walls | Exposed earth in unvented crawl spaces shall be covered with a Class I vapor retarder with overlapping joints taped. | Where provided instead of floor insulation, insulation shall be permanently attached to the Crawlspace walls. |
| Shafts, penetrations | Duct shafts, utility penetrations, and flue shafts opening to exterior or unconditioned space shall be sealed. | · |
| Narrow cavities | | Batts in narrow cavities shall be cut to fit, or narrow cavities shall be filled by insulation that on installation readily conforms to the available cavity space. |
| Garage separation | Air sealing shall be provided between the garage and conditioned spaces. | |
| Recessed lighting | Recessed light fixtures installed in the building thermal envelope shall be sealed to the drywall. | Recessed light fixtures installed in the building thermal envelope shall be air tight and IC rated. |
| Plumbing and wiring | | Batt insulation shall be cut neatly to fit around wiring and plumbing in exterior walls, or insulation that on installation readily conforms to available space shall extend behind piping and wiring |
| Shower/tub on exterior wall | The air barrier installed at exterior walls adjacent to showers and tubs shall separate them from the showers and tubs. | Exterior walls adjacent to showers and tubs shall Be installed. |
| Electrical/phone box on exterior wall | The air barrier shall be installed behind electrical or communication boxes or air-sealed boxes shall be installed. | |
| HVAC register boots | HVAC register boots that penetrate building thermal envelope shall be sealed to the subfloor or drywall. | |
| Concealed sprinklers | When required to be sealed, concealed fire sprinklers shall only be scaled in a manner that is recommended by the manufacturer. Caulking or other adhesive sealants shall not be used to fill voids between fire sprinkler cover plates and walls or ceilings. | |





Get Free Help from Energy Code Experts

Project #: _43.6220.02- ____Date: ______Name of Evaluator(s):____

Residential Inspection Checklist
2015 IECC Commercial Provisions as amended by the 2016 Energy Code Supplement

| Building Con | ntact: Name: | | Phone: | | | Email: | |
|---|--|-----------------|---------------|--------|-------|----------|-----------------------------------|
| Building Nan | ne & Address: | | | | | | |
| Subdivision: | | | Lot #: | | | Co | onditioned Floor Area: ft² |
| Climate Zone | e: County: | | Jurisdiction | า: | | | |
| Compliance | Approach: Prescriptive Tra | de-Off |] Performance | |] Com | pliance | Software Other |
| Compliance | Software Used: | | | Gre | een B | uilding/ | Above-Code Program? ☐ Yes ☐ No |
| Building Typ | e: 1- and 2-Family, Detached: | ☐ Single F | amily 🔲 🗈 | Modula | ar | □т | ownhouse |
| | Multifamily: | ☐ Apartme | ent 🔲 (| Condo | miniu | m | |
| Project Type | : New Building E | xisting Build | ing Addition | | | xisting | Building Renovation |
| Special Cons | | listoric Buildi | | | | | rcial Space |
| | | | 9 | | | | , siai opaso |
| Provisions | Highlighted in Blue are Mandatory, | Regardless | of Complian | ce Pa | th | | |
| IECC | | Code | Verified | C | ompl | ies | |
| Section # | Pre-Inspection/Plan Review | Value | Value | Y | N | N/A | Comments/Assumptions ¹ |
| R103.2 | Construction drawings and documentation available. Documentation sufficiently demonstrates energy code compliance. | | | | | | |
| | aterials and their R-values | | | | | | |
| Fenestration | | | | 1- | | | |
| Area-weight | ed U-ractor system design criteria | | | Η | H | \vdash | |
| | and service water heating system and | d equipment | types, sizes | H | | H | |
| | and systems controls | | | | | | |
| Duct sealing, duct and pipe insulation and location | | | | | | | |
| Lighting fixture schedule with wattage | | | | | | | |
| Air sealing | | | | 14 | | | |
| R403.7 | HVAC loads calculations: Heating system size(s): Cooling system size(s): | | kBtu: | | | | |
| Written State | ement of Compliance from Design Pro | ofessional | | | | | |
| | | | | | 200 | | |

¹ Use Comments/Assumptions to document code requirements that pass due to exceptions, and specify the exception. Also use Comments/Assumptions to document multiple values observed for a given code requirement, such as multiple equipment efficiencies.

| IECC | | | Verified | C | ompli | es | |
|---------------------------------------|--|---|-------------------------|---|-------|-----|----------------------|
| Section # | Requirement | Code Value | Value | Y | N | N/A | Comments/Assumptions |
| R401.3 | Certificate Posting | In furnace/ utility room or approved location | Identify location | | | | |
| Table R402.1.2 | Slab edge insulation R-value. | Unheated: R-10 Heated: R-15 | R Unheated Heated | | | | |
| Table R402.1.2 | Slab edge insulation depth/length. | 2 ft. Z- 4 & 5 4 ft. Z-6 | ft. | | | | |
| Table R402.1.2 | Basement wall insulation R-value ⁱ . | Continuous: R-10 Z-4 R-15 Z-5, Z-6 Cavity: R-13 Z-4 R-19 Z-5, Z-6 | R | | | | |
| R402.2.9 | Basement wall insulation depth. | 10 ft. or to basement floor | ft. | | | | |
| Table R402.1.2 And R402.2.11 | Crawl space wall insulation R-value. From floor to finished grade, plus 2' vertical or horizontal | Continuous: R-10 Z-4 R-15 Z-5, Z-6 Cavity: R-13 Z-4 R-19 Z-5, Z-6 | R | | | | |
| R402.2.11 | Crawl space continuous vapor retarder | Required Class I | | | | | |
| R303.2.1 | Exposed foundation insulation protection. | 6" below grade | | | | | |
| R403.9 | Snow melt controls. | Automatic controls over 50°F | , | | | | |
| Table R402.1.2 | Fenestration U-factor ⁱⁱ | Max: U-0.35 Z-4 U-0.32 Z5, Z-6 | U | | | | |
| R402.5 | Maximum Fenestration U-factor, Area weighted average (trade-offs) | Max: U-0.48 Z-4, Z-5 U-0.40 Z-6 | U | | | | |
| Table R402.1.2 | Glazed Fenestration SHGC | Max: 0.40 Z-4 NR Z-5, Z-6 | SHGC | | | | |
| R402.4.3 | Glazed fenestration air leakage. | 0.3 cfm/ft ² max | cfm/ ft ² | | | | |
| | Window Manufacturer | | | | | | |
| R402.4.3 | Sliding door air leakage. | 0.3 cfm/ft ² max | cfm/ ft ² | | | | |
| R402.4.3 | Swinging door air leakage | 0.5 cfm/ft² max | cfm/ ft ² | | | | |
| | Door Manufacturer | | | | | | |
| Table R402.1.2 | Floor insulation R-value. | Wood: R-19 Z-4 R-30 Z- 5 & 6 ⁱⁱⁱ Steel: ^{iv} See footnote | R Wood Steel | | | | |
| Table R402.1.2 | Wall insulation R-value | Wood: Z-4 and Z-5 = R-20 or R-13+5 Z-6 = R-20+5 or 13+10 Steel: ^v See footnote | R Wood Steel | | | | |

| IECC | | | Verified | Complies | | es | |
|-------------------|---|--|-----------------------|----------|---|-----|----------------------|
| Section # | Requirement | Code Value | Value | Y | N | N/A | Comments/Assumptions |
| Table R402.1.2 | Ceiling insulation R-value | Wood: R-49 (All Zones) Steel Truss ^{vi} R-38+5 | R Wood Steel | | | | |
| R402.2.3 | Eave Baffle | For air- permeable insulation | | | | | |
| Table R402.1.2 | Mass wall insulation R-value. | R-8/13 Z-4 ^{vii} R-13/17 Z-5 ^{vii} R-15/20 Z6 ^{vii} | R | | | | |
| R402.2.13 | Sunroom wall insulation (Enclosing conditioned space) | Per Table R402.1.2 | R | | | | |
| R402.2.13 | Sunroom wall insulation (Thermally isolated and conditioned) | R-13 All climate zones | R | | | | |
| R402.2.13 | Sunroom ceiling insulation (Enclosing conditioned space) | Per Table R402.1.2 | R | | | | |
| R402.2.13 | Sunroom ceiling insulation (Thermally isolated and conditioned) | R-19 Z-4 R-24 Z-5, Z-6 | R | | | | |
| R402.3.5 | Sunroom glazing U-factor (Enclosing conditioned space) | Per Table R402.1.2 | U | | | | |
| R402.3.5 | Sunroom glazing U-factor (Thermally isolated and conditioned) | U-0.45 max. (All Zones) | U | | | | |
| R402.3.5 | Sunroom skylight U-factor (Enclosing conditioned space) | Per Table R402.1.2 | U | | | | |
| R402.3.5 | Sunroom skylight U-factor (Thermally isolated and conditioned) | U-0.70 max. (All Zones) | U | | | | |
| | Skylight Manufacturer | | | | | | |
| R402.2.4 | Attic access hatch and door (insulation) | R-49 (All Zones) | R | | | | |
| R402.2.4 | Attic access hatch and door (weather-stripping) | Wood frame or equivalent insul. retainer | | | | | |
| R402.4.6 | Tenant separation walls | R-10 w/ air seal | R | | | | |
| R402.4 | Air Leakage (Building Thermal Envelope) | All building materials installed per Table R402.1.1 | | | | | |
| R402.4.1.2 | Air Leakage Testing | 3 air changes per hour (All zones) Blower door test | ☐ Stated | | | | |
| R402.4.5 | IC-rated recessed lighting fixtures meet infiltration criteria. | ≤ 2.0 cfm air leakage | Stated | | | | |
| | | Sealed | ☐ Stated | | | | |
| R402.4.4 | Rooms containing fuel burning appliances | Outside or enclosed in a room | ☐ Meets exceptions | | | | |
| R402.1.1 | Vapor Retarder (IRC R702.7) | Class I or II (Zones 5 and 6 only) | | | | | |
| R403.1.1 | Thermostat | Programmable | | | | | |

| IECC | | | Verified | C | ompli | es | |
|-----------|--|--|--|---|-------|-----|----------------------|
| Section # | Requirement | Code Value | Value | Y | N | N/A | Comments/Assumptions |
| R403.3.1 | Duct insulation. | Supply & Return in Attics: R-8 for ≥3" Dia. R-6 for <3" Dia. Other: R-6 for ≥3" Dia. R-4.2 for <3" Dia. | ☐ Inside building thermal envelope exception | | | | |
| R403.3.2 | Duct sealing complies with listed sealing methods. | All joints and seams | ☐ Meets exception | | | | |
| R403.3.3 | Duct Testing | 0.1 inch w.g. pressure differential | Stated | | | | |
| | | Rough-in test required | ☐ Stated | | | | |
| | | Post construction test required | ☐ Stated | | | | |
| | | | ☐ Exception | | | | |
| R403.3.5 | Building cavities NOT used as ducts or plenums | Stated? Shown? | | | | | |
| R403.4 | HVAC piping insulation. | R-3 (>105°For <55°F) | R | | | | |
| R403.5.1 | Heated water circulation and temperature maintenance system | Per requirements of Section R403.5.1.1 or R403.5.1.2 | ☐ Circulation System ☐ Heat Trace System | | | | |
| R403.5.3 | Hot water pipe insulation | R-3 per specified locations | | | | | |
| R404.1 | Lighting – Minimum 75% of lamps are high efficacy. | | | | | | |
| R402.4.2 | Wood burning fireplace | Tight-fitting flue damper or doors | | | | | |
| R403.10 | Pool heaters, covers, and automatic or accessible manual controls. | Accessible on/off switch. Time Switch | | | | | |

ii One side-hinged door up to 24 ft² can be exempted from the prescriptive door U-factor requirements.
iii Or insulation sufficient to fill the cavity, R-19 minimum.
iv Floor steel frame equivalent: See Table R402.2.6
v Wall steel frame equivalent: See Table R402.2.6
vi Steel truss equivalent: See Table R402.2.6
vi The second R-value applies when more than half the insulation is on the interior of the mass wall.